




ST111K

TABLETOP SKINNING MACHINE



MODEL

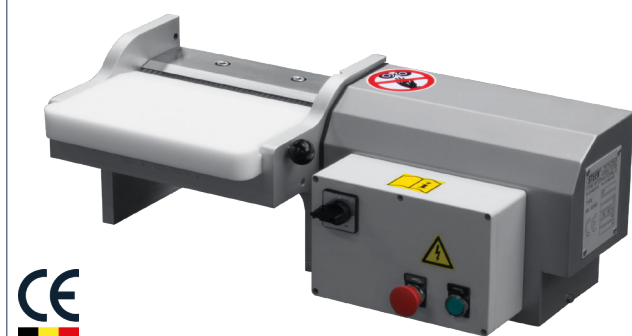

DESCRIPTION



Versatile tabletop skinning machine suitable for bone-in (whole) chicken, duck, pheasant and turkey parts. Parts smaller than a whole leg (except turkey) are not allowed to be skinned on this type of machine. Please check our website and product matrix on the main folder for more information. When ordering, please provide STEEN with the electrical specifications. Also inform us which poultry parts you would like to process including required capacity in pieces per minute. Please also inform if your product is water or air chilled and the time span between killing and skinning. Optimal results occur between 2 and 4°C. In case of special requirements regarding the product, don't hesitate to ask our advice.



Универсальная настольная машина для снятия кожи подходит для целой курицы, утки, фазана и частей индейки. Части меньше чем целая нога (кроме индейки) не разрешается использовать на этом типе машины по соображениям безопасности. Для получения дополнительной информации, пожалуйста, посетите наш сайт и проверьте таблицу с применяемыми продуктами. При заказе, пожалуйста, предоставьте STEEN информацию по требуемому электрическому подключению. Также сообщите нам, какие части птицы вы хотели бы обработать, включая необходимую производительность в штуках в минуту. Пожалуйста, также сообщите нам, если ваш продукт охлажден водой или воздухом и промежуток времени между убоем и снятием кожи. Оптимальные результаты достигаются при температуре 2 - 4°C. В случае особых требований относительно продукта, обратитесь к нам за консультацией.



多用途台式去皮机，适用于带骨（整鸡）鸡肉、鸭肉，野鸡肉 和火鸡肉的去皮。此机器上不适合小于整腿（火鸡除外）部分去皮，请查阅我们的网站和主文件册上的产品列表以了解更多信息。订购时，请告知STEEN您的电源规格，并告知我们您是要处理禽类的哪部分以及每分钟的产量，同时请告知我们您的产品是水冷却还是气冷却，宰杀和去皮之间的时间间隔。产品温度在2-4°C时，去皮效果最好。如果您对产品有特殊要求，请随时咨询我们的意见。

TECHNICAL DATA

FEATURE	DATA
Operators	1
Voltage range (1)	220- 480V 50-60Hz
Power (1)	0,55kW/3 phase
Controls	24V
LxWxH (2)	707 x 313 x 264 mm
Weight (3)	47 kg
Working width (2)	298 mm
Water usage (4)	-
Water connection	1/2"
Air usage	-
Air connection	-
Speed (5)	+/- 22 m per minute

(1) depending on requested voltage

(2) 1mm = 0,03937 inches




(3) 1kg = 2,20462 pounds

(4) spray system is optional if required

(5) $\frac{2200\text{cm/min}}{\text{length part (cm)} + 5\text{cm}} = \text{theoretical capacity}$



FOOTPRINT

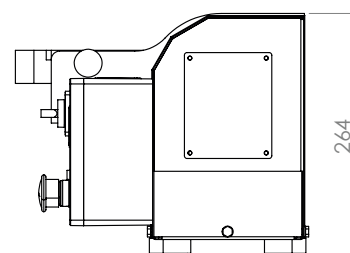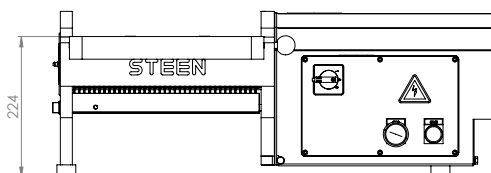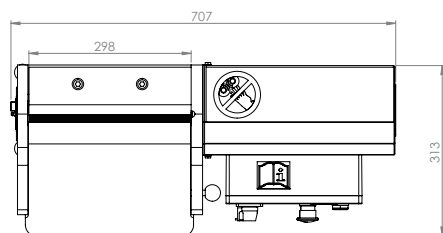

Due to the high degree of customization possibilities, technical data of the final product may vary.






OPTIONS



ST111K

TABLETOP SKINNING MACHINE

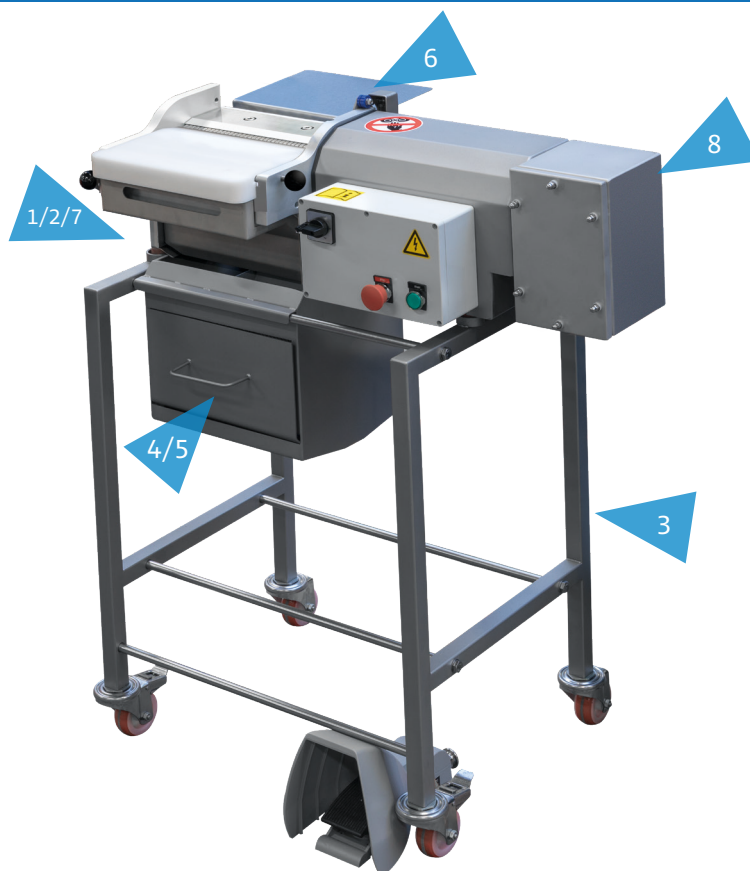

111/SC045A 1	111/SC060A 2	111/SC602 3	111/SC603 111/SC611 4 5
			
Guarded shielding	Poultry comb	Table for machine at optimal height	Skin collector with (603) or without (611) water drainage
111/SC018A8 6	111/SC042A 7	111/SC600MF 8	CUSTOMIZED 9
			
Outfeed tray	Spray system	Converter 220V single phase	Tailor-made solution

Due to the high degree of customization possibilities, technical data of the final product may vary.