




ST504

EEL GUTTING MACHINE



MODEL

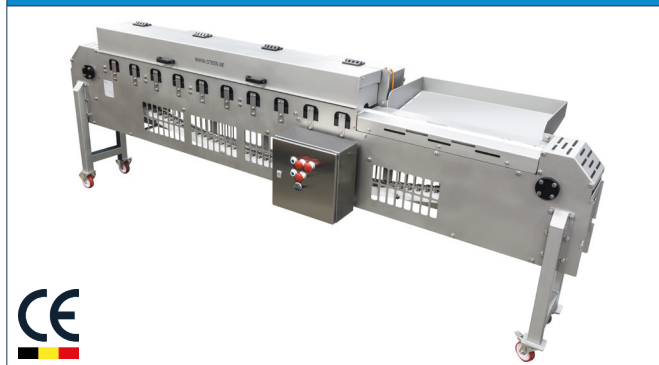

TECHNICAL DATA

FEATURE	DATA
Operators	1
Voltage range (1)	220- 480V 50-60Hz
Power (1)	3,1kW/3Ph
Controls	24V
LxWxH (2)	3550 x 1000 x 1265 mm
Weight (3)	402 kg
Working width (2)	950 mm
Water usage (4)	2,7- 3l/min
Water connection	Ø8
Air usage	-
Air connection	-
Speed (5)	+/- 23 pcs per minute

(1) depending on requested voltage

(2) 1mm = 0,03937 inches

(3) 1kg = 2,20462 pounds

(4) 2 bar

DESCRIPTION



Gutting machine for farmed eels from 100 to 250 grams on the same setting. Please check our website and product matrix on the main folder for more information. When ordering, please provide STEEN with the electrical specifications and water connection available. Also inform us which eel species (preferably the scientific name) you would like to process with what capacity. Please indicate if you have any special requirements regarding the product.






Машина для потрошения выращенных угрей, весом от 100 до 250 грамм без переналадки оборудования. Для получения дополнительной информации, пожалуйста, посетите наш веб-сайт и посмотрите таблицу продуктов в основной папке. При заказе, пожалуйста сообщите STEEN о требуемых характеристиках электропитания и подсоединения воды. Также сообщите нам, какие виды угря (желательно научное название) вы хотели бы обрабатывать, планируемые объемы. Пожалуйста, укажите, есть ли у вас какие-либо особые требования к продукту.



去脏机适合在同一环境下养殖的100-250g的鳗鱼去脏。请查阅我们网站和产品列表以获得更多信息，订货时，请向STEEN公司说明电器规范和水源连接规格，还要告诉我们您加工的是哪种鳗鱼（最好是学名）以及加工产量，请说明您对鱼是否还有特殊要求。



FOOTPRINT

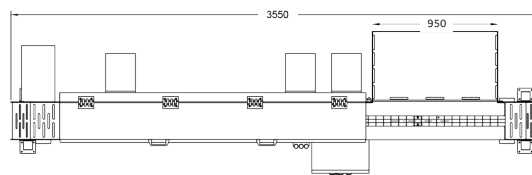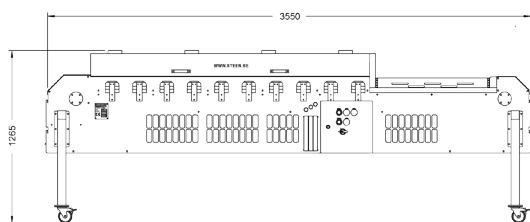


Due to the high degree of customization possibilities, technical data of the final product may vary.




ST504

EEL CUTTING MACHINE

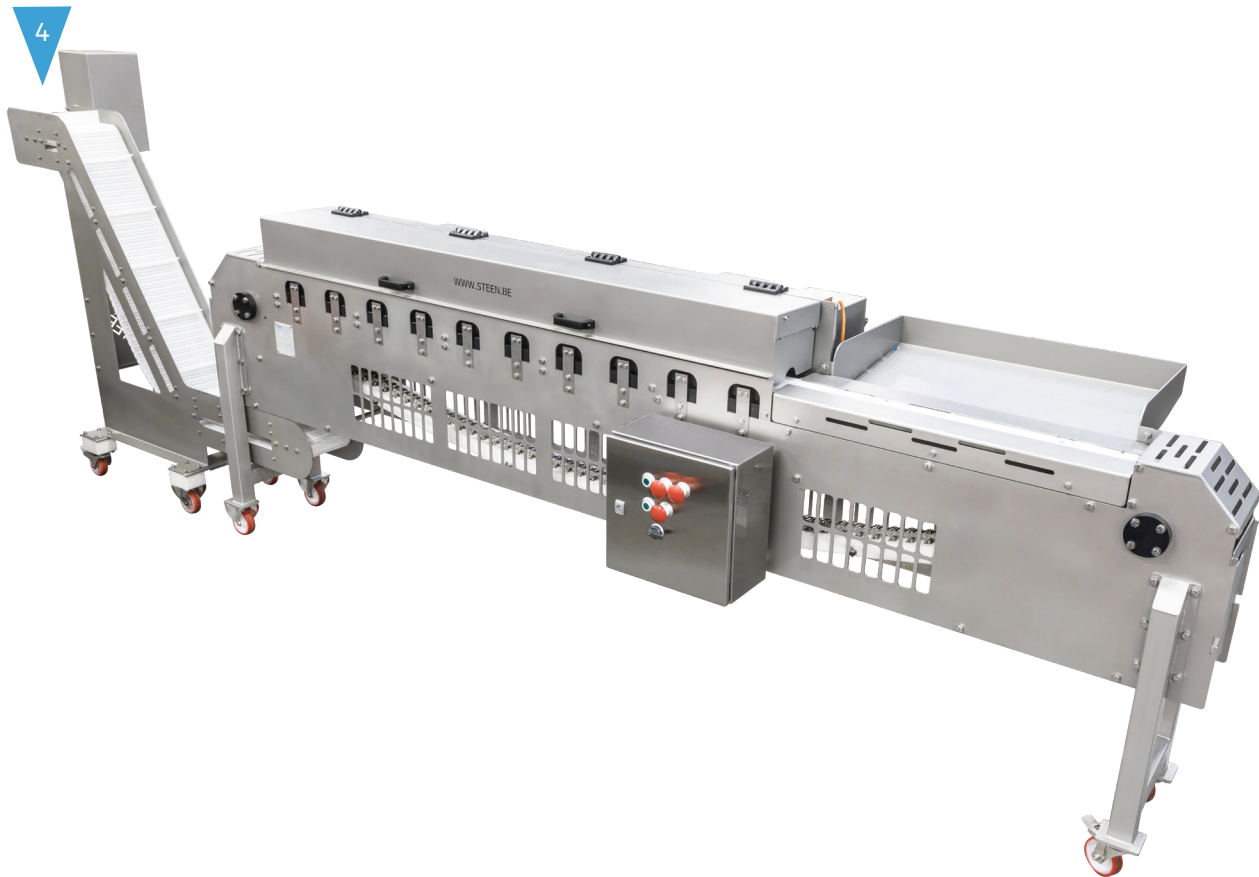

504/024AVI

1



Vacuum inside placement

504/024AVP

2



Extra pump

504/024AWP

3



Collection reservoir;
pneumatically operated

504/BELT


4



Outfeed belt

CUSTOMIZED

5



Tailor-made solution

Due to the high degree of customization possibilities, technical data of the final product may vary.