

**ST700V**

AUTOMATIC SKINNING MACHINE - LONG MODEL

MODEL**TECHNICAL DATA**

FEATURE	DATA
Operators	1-2
Voltage range (1)	220- 480V 50-60Hz
Power (1)	1,6kW/3 ph
Controls	24V
LxWxH (2)	2975 x 1075 x 1257 mm
Weight (3)	407 kg
Working width (2)	480 mm
Water usage	8 l/m
Water connection	1/2"
Air usage	-
Air connection	-
Speed (4)	+/- 21 m per minute

(1) depending on requested voltage

(2) 1mm = 0,03937 inches

(3) 1kg = 2,20462 pounds

(4) $\left(\frac{2100 \text{ cm/min}}{\text{length fillet (cm)} + 5 \text{ cm}} \right) \times 2 = \text{theoretical capacity}$ **DESCRIPTION**


Versatile automatic skinning machine suitable for many fish species and sizes with the possibility to deep-skin. Please check our website and product matrix on the main folder for more information. When ordering, please provide STEEN with the electrical specifications and water connection available. Also inform us which fish species (preferably the scientific name) you would like to process including capacity and general length. Please also indicate if you have any special requirements regarding the product.



Универсальная автоматическая машина для снятия кожи подходит для многих видов и размеров рыбы с возможностью глубокого снятия кожи. Для получения дополнительной информации, пожалуйста, посетите наш веб-сайт и посмотрите таблицу продуктов в основной папке. При заказе, пожалуйста, сообщите STEEN о требуемых характеристиках электропитания и подсоединения воды. Также сообщите нам, какие виды рыбы (желательно научное название) вы хотели бы обрабатывать, планируемые объемы переработки, длину рыбы. Также укажите, есть ли у вас какие-либо особые требования к продукту.



多功能自动去皮机适合于很多种类和尺寸的鱼，可加工深去皮鱼，请查阅我们网站和产品列表以获得更多信息，订货时，请向STEEN公司说明电器规范和水源连接规格，还有告诉我们您加工的是哪种鱼（最好是学名），以及产量和一般长度，请说明您对于鱼是否有特殊的要求。

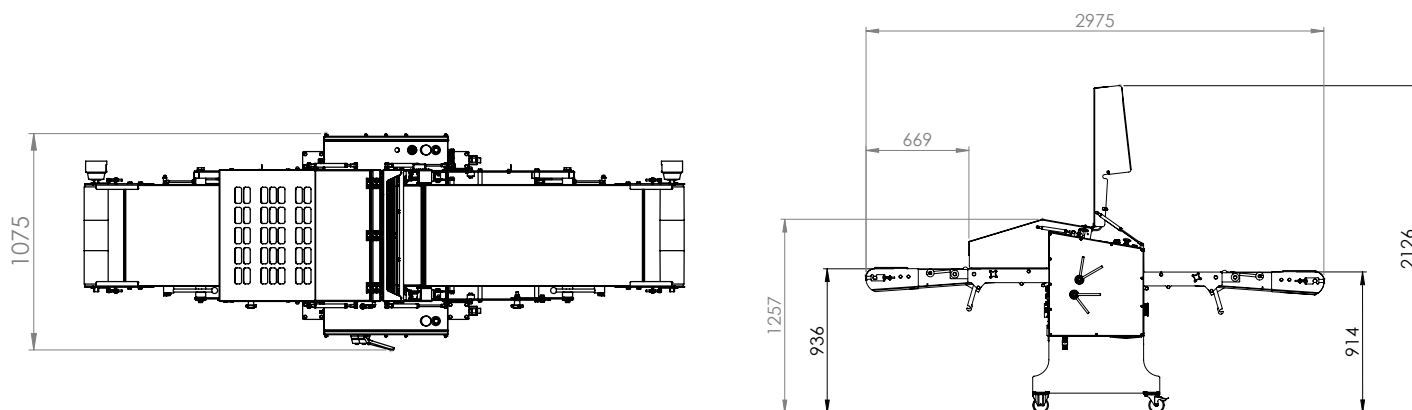**FOOTPRINT**

Due to the high degree of customization possibilities, technical data of the final product may vary.



OPTIONS



ST700V

AUTOMATIC SKINNING MACHINE - LONG MODEL



700/TABLE

1



Infed table

700V/INFEED


2



Short infed conveyor = -546mm

700V/OUTFEED

3

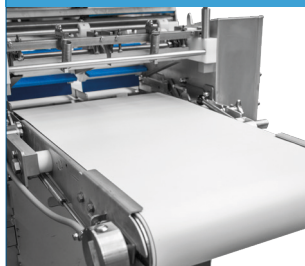

Short outfeed conveyor = -549mm

700V/BLADE

4



Extra blade for more possibilities (deepskin)

700V/SPEED

5



Speed regulator

700/3Z100

6




Table for storing knife and dispose blades.

CLEANING



Cleaning mode

CUSTOMIZED

7



Tailor-made solution

Due to the high degree of customization possibilities, technical data of the final product may vary.